HOLOPHANE®

Wallpackette® III

MADE IN BRITAIN®

Wallpackette® III has been precision engineered utilising proven optical performance to illuminate and limit glare. The precisely moulded prismatic refractor reduces luminaire brightness whilst controlling and directing the maximum amount of light downwards, forwards and sideways to create a uniform horizontal illuminance. With considerable attention given to vandalism, Wallpackette® III is supplied as standard with a tough, durable prismatic polycarbonate front cover, which deters vandals and protects the luminaire from impact damage.

Applications

- Walkways
- Corridors
- Tunnels
- Car parks
- Loading bays
- Amenity areas
- Building perimeters
- Subways

Optics/light source

- 3000 lumen package

Features and benefits

- **Robust construction**
  Durability
- **Tough prismatic refractor**
  Maximum efficiency & low glare
  Vandal resistant
- **Wide spacing characteristics**
  Cost savings due to reduced number of luminaires
- **Emergency lighting versions**
  Improved security

TM66 CEAM-Make rating

Preliminary Rating: 2.1 (Definite/substantial progress to circularity)

Approvals

Complies with EN60598

CE | UK CA

IP65 housing for outdoor use

MADE IN BRITAIN

For further information please visit the Holophane website **www.holophane.co.uk**

Dimensions & performance

Specification

The luminaire shall consist of a die-cast aluminium body, housing integral driver and LEDs. The body shall also contain a contoured aluminium reflector used in conjunction with the prismatic one-piece injection moulded polycarbonate optical assembly. A sprung latch assembly exerts uniform pressure on the gasket all round ensuring IP65. The luminaire shall be suitable for wall mounting and complies with EN60598, with a choice of options and accessories.

Weights & thermal data

Lamp	TypeWeight (kg)	Min Operating Temperature (°C)	Max Ambient* Temperature (°C)
3000lm LED	5.0	-30	45

* The maximum ambient temperatures stated are for exterior use only.
For interior use deduct 10°C from the temperature stated.

Light distributions



Photometric data is available at
www.holophane.co.uk

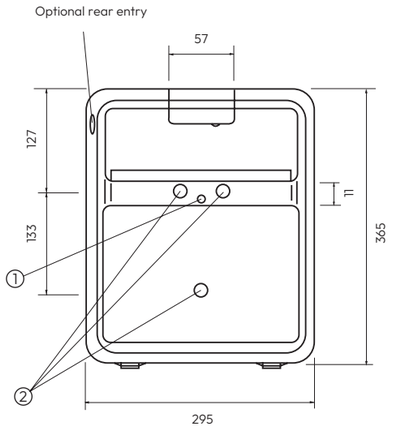

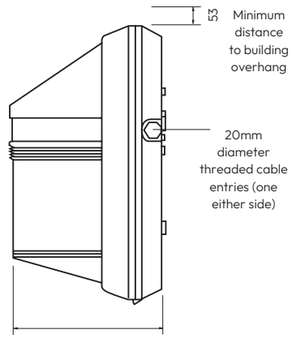

① 19mm diameter knockout for supply cable, rear entry

② 3 fixing positions screws, plugs and washers supplied

Note: The specifications of the Holophane luminaire and columns represents typical values. All descriptions, illustrations, drawings and specifications in the Holophane catalogue and website represent only general particulars of the goods to which they apply and shall not form part of any contract. The company reserves the right to change specifications at its discretion without prior notification or public announcement.

Ordering details

Code	Product family		
WPT	Wallpackette III		
	Code		
	.LM034	LED light engine producing c.3,000 lm with a nominal 2700K/3000K/4000K colour temperature, 70 CRI	
		Code	**Colour** (required)
		.C4	Graphite (RAL 7011)
		.C6	Smooth Grey (RAL7035)
		.C7	Black (RAL9005)
		RAL****	RAL Colour (Customer choice)
		Code	**Options**
		.C	Enhanced paint finish
		.P	PG Entry
		.T	Photocell (Factory Fitted)
		.TW	Through wiring
		.EM1	Self contained (self-test) 1hr maintained emergency battery and invertor
		.EM3	Self contained (self-test) 3hr maintained emergency battery and invertor
WPT	.LM034	.C4	.P
Example			

*Please specify RAL colour reference. Note: Luminaires are supplied as standard for use on 240V 50Hz supply and complete with lamp. For 230V 50Hz add prefix 'N' Other voltages available on request. Timed ignitors as specials available on request.

Accessories

WPT.TC70	Photocell (Retro-fit)
HEL.VK	Vandal Key

Wallpackette® III

Shaping light for people and place

If you would like to discuss your next project, our team is here to help.

Holophane Europe Ltd.
Bond Avenue, Bletchley,
Milton Keynes, Bucks, MK1 1JG

01908 649292
info@holophane.co.uk
holophane.co.uk

HOL-BRO-WPT-UK-07/26

GOLD GROUP MEMBER

theLIA